


I-SHEET NUMBER: INST-00016 PART NUMBER: T07-CCTX, T07-QCTX PRODUCT: Growler Running Board APPLICATION: 07-18 CREW MAX, QUAD CAB

HARDWARE DESCRIPTION		OTV
HWKT-00025X		QTY.
FLBW-00894	M8-1.25 X 30MM CLASS 8.8 FLANGE CAP SCREW W/WASHER	16
FLHB-00688	3/8"-16 X 1" GRADE 5 HEX SERRATED FLANGE BOLT	16

PARTS INCLUDED	
Running Boards	
Rocker Panel mounting Brackets	
Threaded clamp plates	






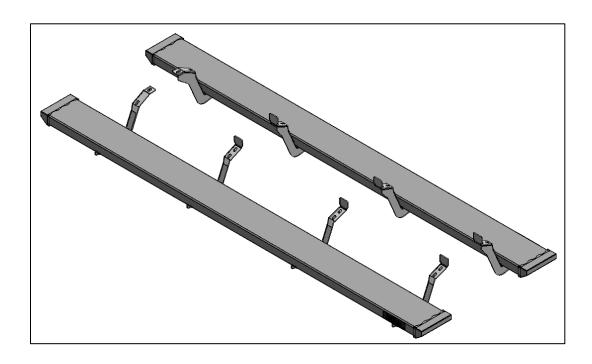


<u>Step 1</u> Beginning with the driver side, remove the factory hardware and discard.

<u>Step 2</u> Next, install the four rocker panel mounting brackets with the supplied M8x25mm Hex bolts with integrated washers and leave loose.

NOTE: The brackets are labeled 1-4 from front to back.

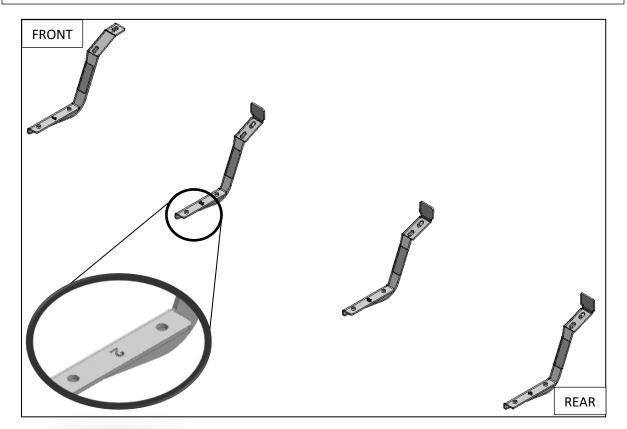

<u>Step 3</u>: Set running board along the top of all four brackets and center along the cab.

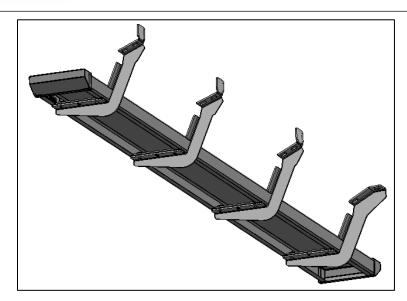




I-SHEET NUMBER: INST-00016 PART NUMBER: T07-CCTX, T07-QCTX PRODUCT: Growler Running Board APPLICATION: 07-18 CREW MAX, QUAD CAB

<u>Step 4</u>: Insert the supplied threaded brackets (x4) inside the running board lip over the top of each bracket.

<u>Step 5:</u> With the supplied 3/8" x 1" hex bolts, secure each mounting location and leave loose.

<u>Step 6:</u> After final adjustment, tighten all running board threaded mounts.

<u>Step 7</u>: Next, adjust frame brackets so the running board is level with body of the vehicle and tighten all factory-mounting locations.

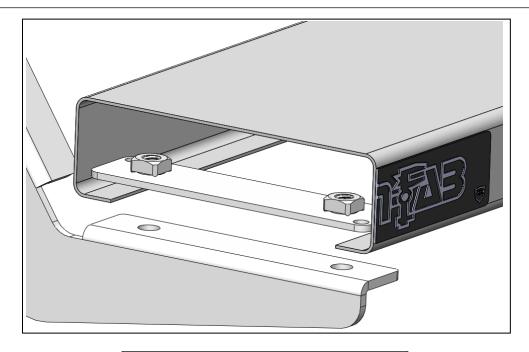

<u>Step 8</u>: Re-peat steps 2-7 for passenger side.